

Smart

-  DYNAMIC GEOLOCATION
-  PERCEIVED TEMPERATURE
-  ENVIRONMENTAL SAVINGS
-  ADAPTIVE GAIN CONTROL (AGC)

SIMPLY SMART



C800 WIFI

SMART PROGRAMMABLE THERMOSTAT 





C800 WiFi

SMART PROGRAMMABLE THERMOSTAT 




C800 WiFi Q
SQUARE
THERMOSTAT



C800 WiFi R
RECTANGULAR
THERMOSTAT



C800 AL
FLUSH MOUNTING
POWER SUPPLY KIT



C800 WiFi PRO
C800WIFIQ + RECTANGULAR BASE
+ FLUSH MOUNTING POWER SUPPLY KIT


-  DYNAMIC GEOLOCATION
-  PERCEIVED TEMPERATURE
-  ENVIRONMENTAL SAVINGS
-  ADAPTIVE GAIN CONTROL (AGC)
-  DOUBLE POWER SUPPLY
-  OPEN WINDOW DETECTION
-  VOICE CONTROL ^(*)
-  REMOTE CONTROL BY APP
-  INTEGRATED WiFi
-  WORKS WITH amazon alexa

^(*) presently available only in Italy / Italian language.

TECHNICAL FEATURES

Temperature regulation range	2 ÷ 40 °C, increase 0,1°C
Power supply	2 batteries 1,5V AA or 230Vac @50Hz
Contacts rating	5(3)A 250 Vac
Adjustable differential	STD, 0,3 ÷ 5 K
Thermal gradient	4 K/h
Ambient RH display range	0 ÷ 99 %, increase 1%

DIMENSIONS (mm)

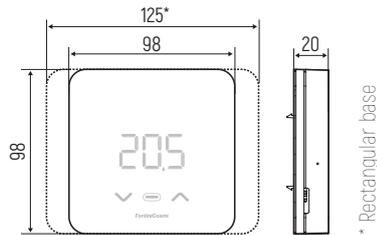


HOMOLOGATION AND STANDARD


- Complies with EN 60730-1 standards;
- Compliant with Directive 2014/53 / UE (RED)
- Class IV; 2% (Reg. EU 811/2013 - 813/2013)




INSTALLATION



Wall mounting (for battery supply) or flush mounting in 500 or 502 module boxes (for 230Vac supply).



Wall mounting (for battery supply) or flush mounting in 503 module box (for 230Vac supply).



Available FLUSH MOUNTING POWER SUPPLY KIT 230Vac/3.3Vcc for C800 series.

CODES

C800WIFIPRO	Smart Programmable Thermostat with power supply kit, square and rectangular bases
C800WIFIQ	Smart Programmable Thermostat with square base
C800WIFIR	Smart Programmable Thermostat with rectangular base
C800AL	Power supply kit 230Vac/3.3Vcc for C800 series



FANTINI COSMI SPA
Via dell'Osio 6 - 20049 Caleppio di Settala MI, Italy
Tel. +39 02 95682 222 | export@fantinicosmi.it

www.fantinicosmi.com

