



070RL

SMART THERMOSTATIC
RADIATOR VALVE



FantiniCosmi

070RL




Find out more



SMART THERMOSTATIC RADIATOR VALVE

MAIN FEATURES


- Display orientation selectable in 3 positions
- Stand-alone mode or automatic Multi-zone mode when paired with the *Intellicomfort+* thermoregulation system
- **LoRa™** long-range communication protocol
- Open Window function to reduce ENERGY waste
- Room temperature display on the valve or by a Master device
- Manual temperature setting

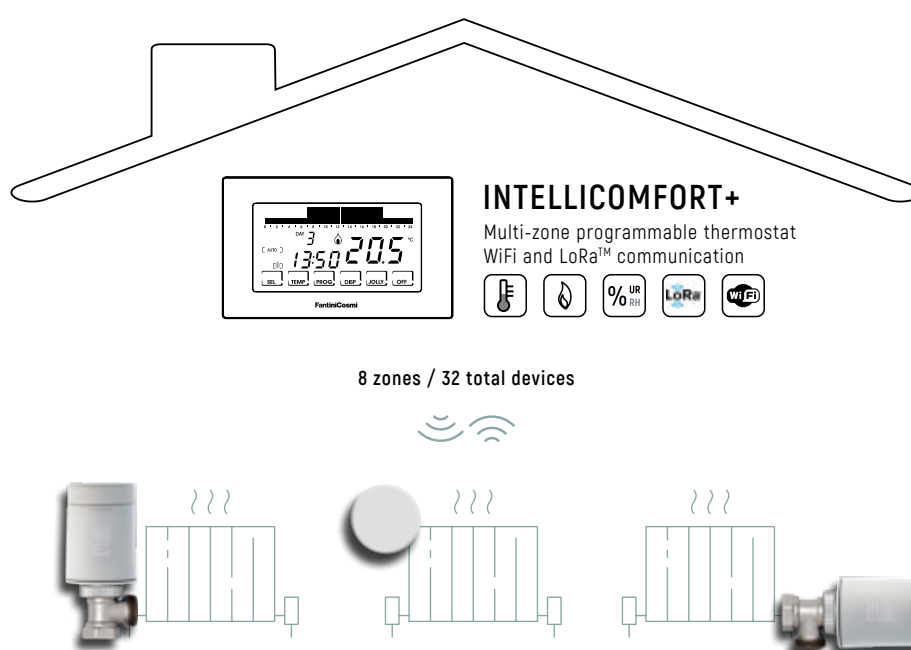

TECHNICAL SPECIFICATIONS

Operating temperature	2 ÷ 30 °C, increase 0,1°C
Power supply	2 AA batteries 1.5V
Battery life	18 months
Transceiver frequency	Wireless 868 MHz
Valve connection	M30 x 1,5
Protection degree	IP30

DIMENSIONS (mm)

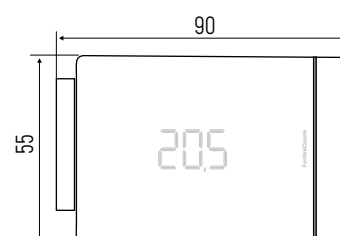

REGULATIONS AND APPROVALS

Complying with standards EN 60730-1 and second parts; Directive 2014/53/UE (RED).